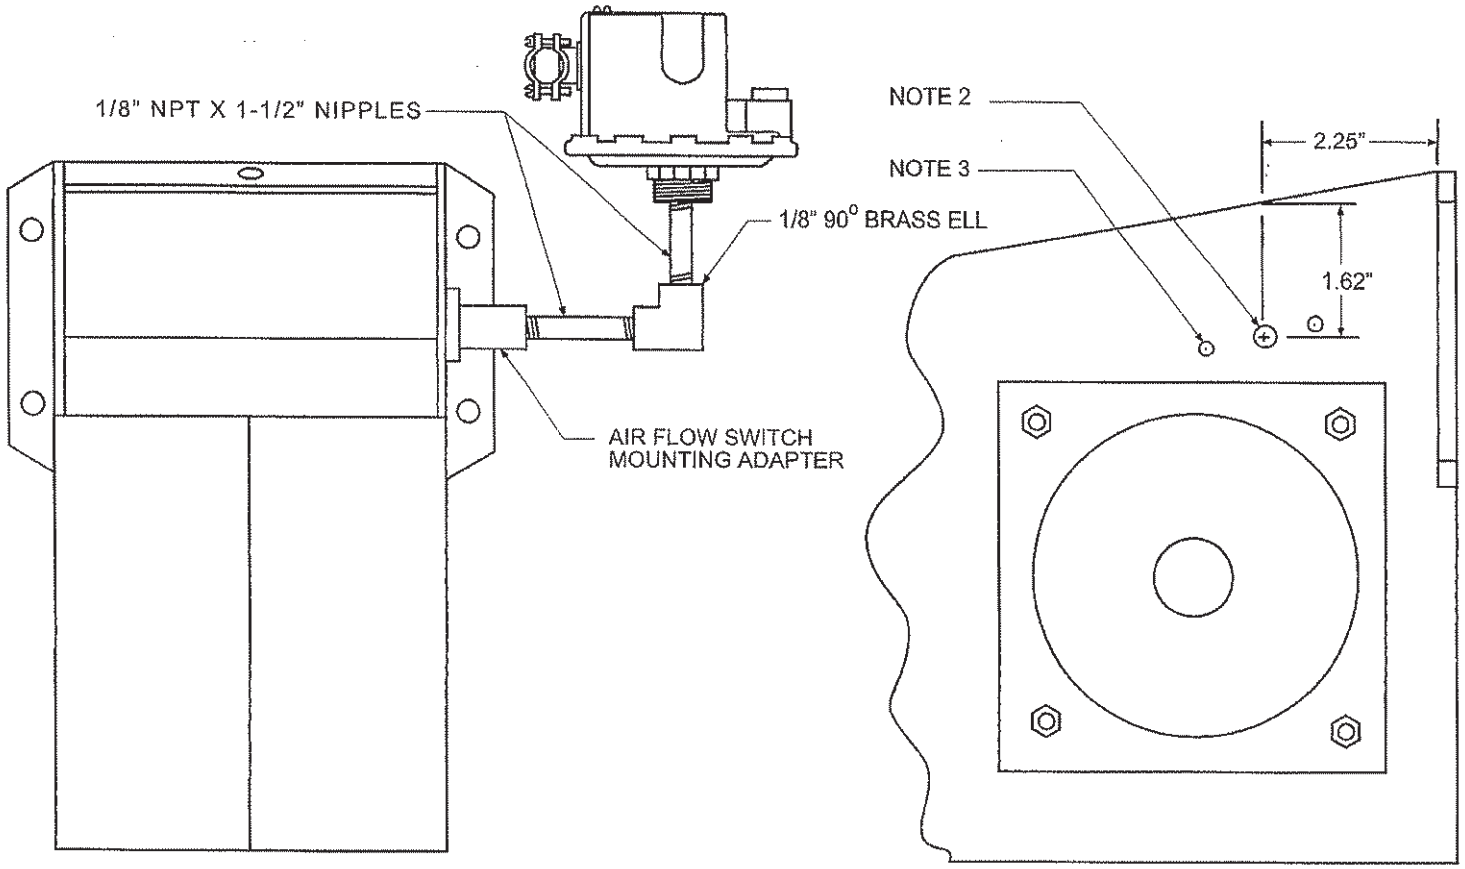

NOTES

1. Lift the top cover and remove the old sail switch. Plug the hole with the black nylon plug provided.
2. Drill (1) .375 dia. hole at location indicated.
3. Center the air flow switch mounting adapter over the .375 dia. hole and mark the location for the (2) mounting screws.
4. Reference the manufacturers installation and operation instruction sheet.

REV	ECN	CK	
			DIAPHRAGM AIR FLOW SWITCH CONVERSION KIT FOR MODEL "S4" BURNERS.
00			